

DRIVE THE CHANGE



BR.2017.01.00003.02.02



MINI DIGGER HIRE LTD
ANDY ROSETHORN

t:07908 498 895
e:sales@cormidi-sales.co.uk
www.cormidi-sales.co.uk

CORMIDI

CMF
MULTI FUNCTION MACHINE



DRIVE THE CHANGE

MAXIMUM EFFICIENCY



After long testing and optimization, our machines are being continuously improved to offer you the best solution for your work. Our machines have the best efficiency and performance in the market.

UNDERCARRIAGE



We focused heavily on the undercarriage, creating a track that never comes off so you can concentrate on your job.

SIMPLY AMAZING



Cormidi CMF series has become the benchmark for machines in its class. Its ability to meet customer's needs regarding great performance, extreme reliability and reduced fuel consumption is outstanding.

CORMIDI

CMF
MULTI FUNCTION MACHINE



DRIVE THE CHANGE

STRENGTHS



ONE STOP MAINTENANCE

All the daily maintenance checks (such as levels, filters, and fuses) are easily accessible, allowing you to reduce the time you spend on machine inspection



FLOAT OPTION ARM

All machines come with an easily-activated float option arm



HORN

The horn is located for easy access to increase safety of operations



CHECK OIL

There is a single access point for checking the level, checking the temperature, and filling hydraulic oil.



PARKING BRAKE

The machines have parking brakes to keep the machine safe or to use in an emergency procedure.



DASHBOARD

The dashboard provides all your information in one place: tachometer, hour meter, fuel gauge, and alarm light.



EASY ATTACH

With Cormidi Quick Attach, you can run the machine each time with a different attachment: dumper, miniloader, concrete mixer, etc. You just attach, check the configuration, and go.



BUZZER

Every alarm has a loud buzzer that will catch your attention.



SAFETY

Every attachment we make has safety bars and protections so you work safely

CORMIDI

CMF
MULTI FUNCTION MACHINE



DRIVE THE CHANGE

THE STANDARD



CMF is the gold standard that drives change in the market. Cormidi machines are more productive, more reliable, and more cost-efficient.


HEAVY DUTY MACHINE



The undercarriage has been created for the toughest jobs. It is heavy duty and indestructible.

The rubber track's special design is optimized for continuous performance with great traction and a long life with no wear.

SAFE AND STRONG

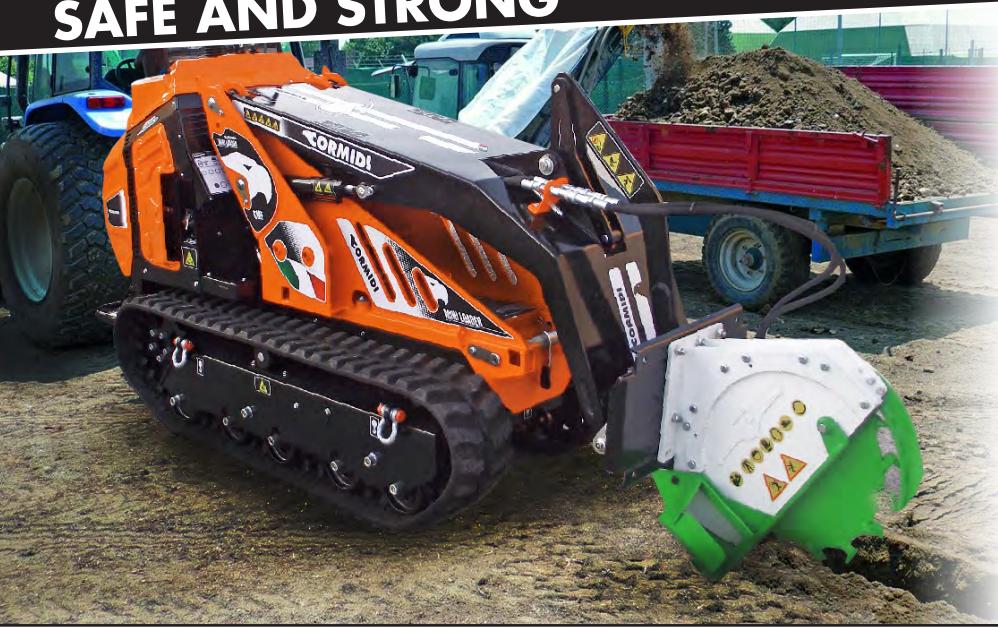

Driving a Cormidi machine will help you work more easily in every condition of your hard work, offering you great performance, lower fuel consumption, higher speeds, and the most stability and safety in its class

CORMIDI

CMF
MULTI FUNCTION MACHINE




STRENGTHS



UNDERCARRIAGE

The special design of this undercarriage is advantageous to your work safety and drive comfort in all conditions. The rubber track never comes off and has excellent life while the

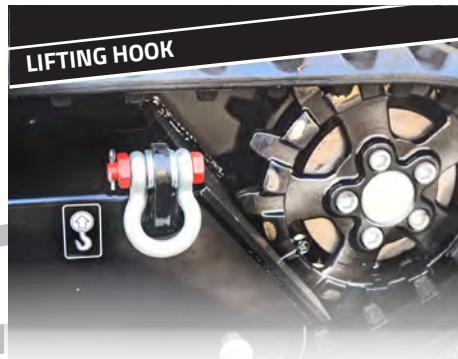

LIFTING HOOK

The machine is easy to transport to any place you need it.



HYD LEVERS SETTABLE

This option makes your machine more customizable to your preferences and comfortable to use by allowing you to change the functions of the levers used to run the machine




HYD OUTPUT AUX

The machine can handle 3 auxiliary outputs that permit you to use different tools at the same time



ASPS

The Anti-Stall Power System (ASPS) means excellent performance. By allowing you to optimize the power of the machine while running your selected tools, it allows you to move more power to the tools with speed control, ensuring your engine never overloads. Your tools will always work at full capacity.

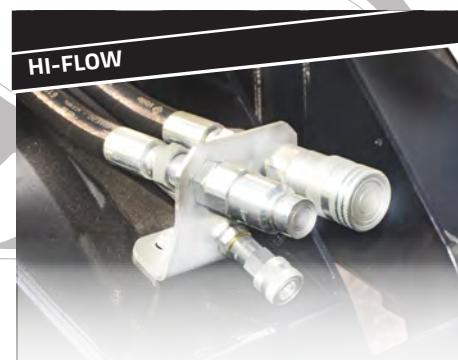

HI-FLOW

The CMF machine has a special Hi-Flow system with two variable piston pumps with automatic constant power so the machine always has maximum power available (and never a stalled engine), which allows you to run your tools with amazing power and performance.




**AUTOLEVELLING FORK-BUCKET
PLUS DUMP SETTABLE**

This amazing feature allows you to lift anything without worrying about its level; the self-leveling boom does that work for you. Plus, you can set the angle of the dumping feature for the need of any job



UNIVERSAL FRONT PLATE

The front plate lets you use any mini loader attachment on the market.

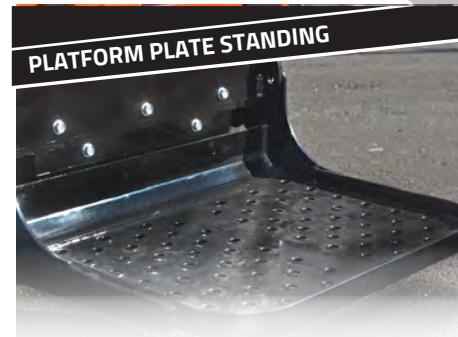

PLATFORM PLATE STANDING

In situations in which a shorter machine is necessary, you can close up the platform plate for 16 fewer inches and simply walk behind the machine


CORMIDI

CMF
MULTI FUNCTION MACHINE




DRIVE THE CHANGE

HI-FLOW

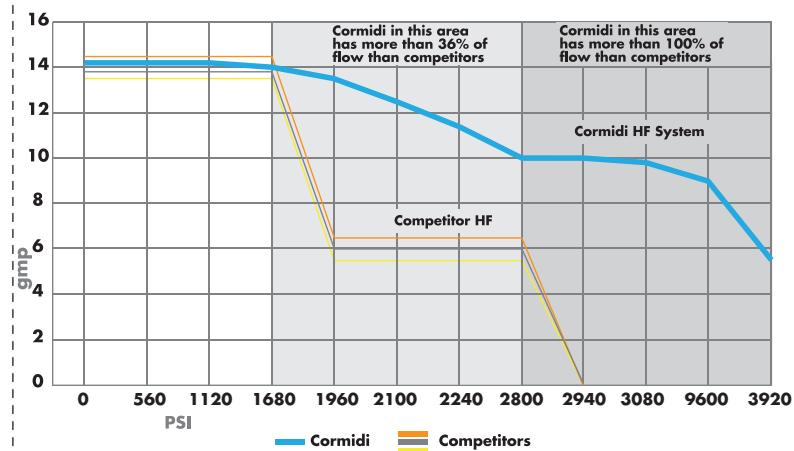


Cormidi machines have the most efficient Hi-Flow system available on the market. Two variable piston pumps with automatic constant power means the machine always has maximum power available without a stalled engine.

RUBBER TRACK LIFE

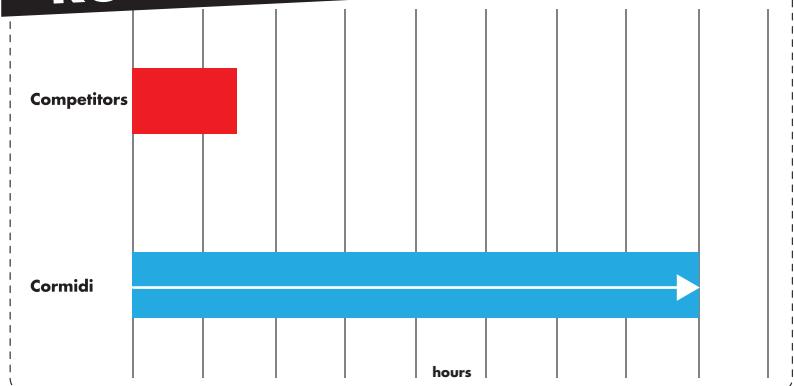


Spare yourself a headache. Cormidi's undercarriage is the best heavy duty undercarriage in its class

TORQUE TRANSMISSION

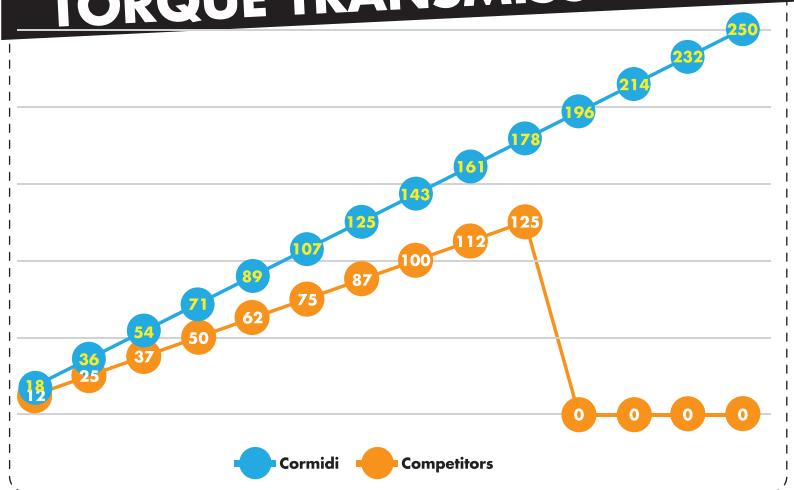


Cormidi uses the latest and most advanced technology on market for its transmission to focus on reducing fuel consumption while increasing performance.


SPECS DIFFERENCES



SPEC 1
This configurations provides a hydraulic circuit with two distributor elements capable of allowing two actions of the machine at the same time through movement of a single lever.

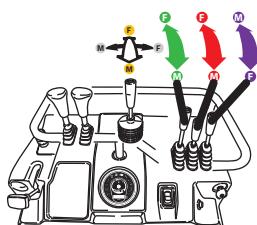


SPEC 2
This configuration adds a second distributor to the Spec 1 configuration, which allows three additional actions, for a total of five allowable actions.

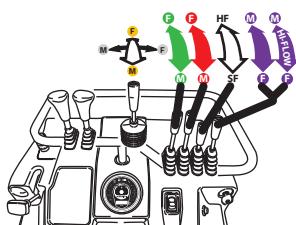


SPEC 3
This configuration is identical to Spec 2 with the addition of another hydraulic pump to create a Hi-Flow circuit. The Hi-Flow allows the use of equipment which requires more GPM, such as the Snow Turbine, Weed Wacker, Harley Rack, etc.

INNOVATIVE EASY ATTACH

ONE MACHINE, 100 CONFIGURATIONS

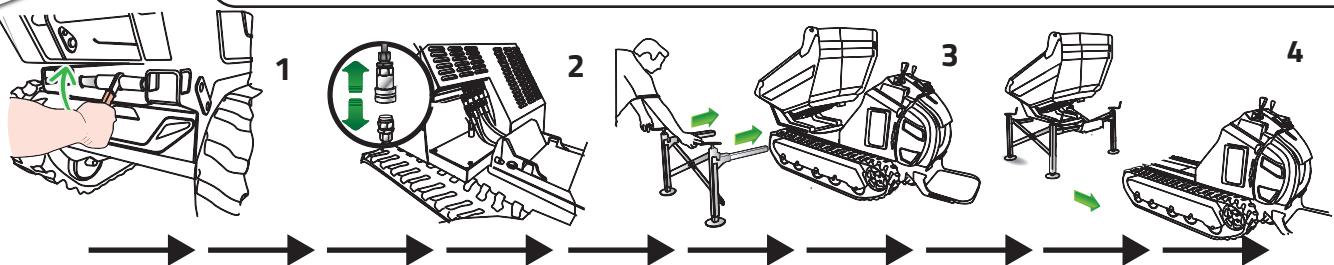

HOW TO REMOVE THE ATTACHMENT

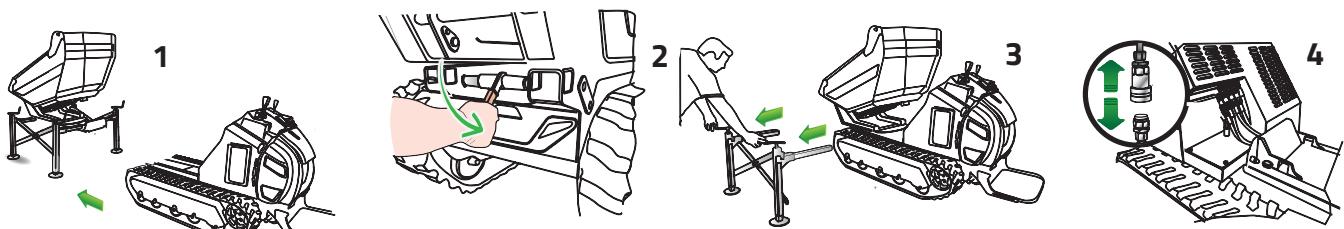

HOW TO INSTALL THE ATTACHMENT

CORMIDI

CMF
MULTI FUNCTION MACHINE



DRIVE THE CHANGE

MINI LOADER



Innovative
Easy Attach


available

CMF



ML

- ① lifting arm
- ② tilting bucket
- ③ universal plate

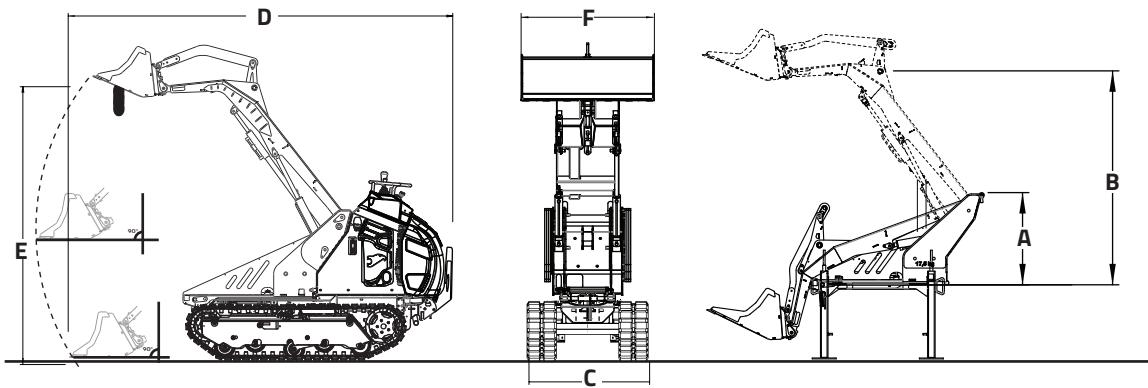

	C1150		C1200		C1300		C1350		C1400		C1500		C1600	
	mm	in												
A	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7
B	1688	66.5	1688	66.5	1585	62.4	1585	62.4	1585	62.4	1585	62.4	1585	62.4
C	845	33.3	865	34.1	865	34.1	895	35.2	945	37.2	895	35.2	945	37.2
D	2423	95.4	2423	95.4	2850	112	2850	112	2850	112	2850	112	2850	112
E	1913	75.3	1913	75.3	2250	88.6	2250	88.6	2250	88.6	2250	88.6	2250	88.6
F	1000	39.4	1000	39.4	1000	39.4	1000	39.4	1000	39.4	1000	39.4	1000	39.4

	C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE CAPACITY	1150 kg 2535 Lb	1200 kg 2646 Lb	1300 kg 2866 Lb	1350 kg 2976 Lb	1400 kg 3087 Lb	1500 kg 3307 Lb	1600 kg 3527 Lb
ATTACHMENT WEIGHT	281 kg 620 Lb	281 kg 620 Lb	330 kg 728 Lb				
MACHINE WEIGHT	775 kg 1709 Lb	795 kg 1753 Lb	870 kg 1918 Lb	890 kg 1962 Lb	910 kg 2006 Lb	910 kg 2006 Lb	919 kg 2027 Lb
TOTAL WEIGHT	1056 kg 2328 Lb	1076 kg 2372 Lb	1200 kg 2646 Lb	1220 kg 2690 Lb	1240 kg 2734 Lb	1240 kg 2734 Lb	1249 kg 2754 Lb



MINI LOADER SPECIFICATIONS

C1150 - C1200

C1300 - C1350 - C1400 - C1500 - C1600

TIPPING LOAD

Without counterweight
857 KG 1867 LB

With counterweight (210kg 462lb)
996 KG 2195 LB

Without counterweight
994 KG 2191 LB

With counterweight (210kg 462lb)
1150 KG 2535 LB

TIPPING LOAD SAE 50%

Without counterweight
429 KG 934 LB

With counterweight (210kg 462lb)
498 KG 1098 LB

Without counterweight
497 KG 1096 LB

With counterweight (210kg 462lb)
575 KG 1268 LB

TIPPING LOAD SAE 35%

Without counterweight
300 KG 661 LB

With counterweight (210kg 462lb)
348 KG 768 LB

Without counterweight
348 KG 767 LB

With counterweight (210kg 462lb)
403 KG 888 LB

WEIGHT

Without counterweight
281 KG 619 LB

With counterweight (210kg 462lb)
491 KG 1081 LB



Without counterweight
330 KG 728 LB

With counterweight (210kg 462lb)
540 KG 1190 LB

ACCESSORIES



SETTABLE AUTOLEVELLING

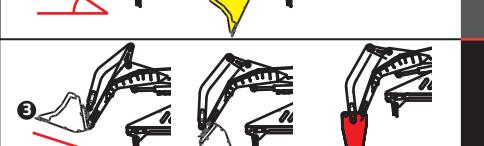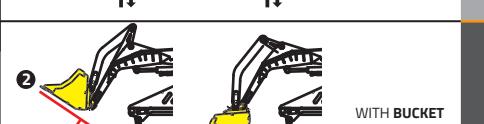

NORMAL AND AUTOLEVELING

+ DUMP

++ DUMP

DUMPER SKIP





Innovative
Easy Attach

CMF



RI

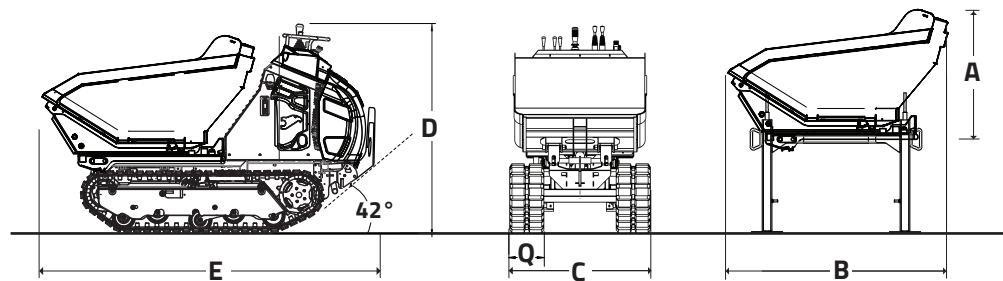

	C1150		C1200		C1300		C1350		C1400		C1500		C1600	
	mm	in												
A	828	32.6	828	32.6	828	32.6	828	32.6	828	32.6	828	32.6	828	32.6
B	1410	55.5	1410	55.5	1460	57.5	1460	57.5	1460	57.5	1460	57.5	1460	57.5
C	845	33.3	865	34.1	865	34.1	895	35.2	945	37.2	895	35.2	945	37.2
D	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1

	C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE CAPACITY	1150 kg 2535 Lb	1200 kg 2646 Lb	1300 kg 2866 Lb	1350 kg 2976 Lb	1400 kg 3087 Lb	1500 kg 3307 Lb	1600 kg 3527 Lb
ATTACHMENT WEIGHT	210 kg 463 Lb	210 kg 485 Lb	220 kg 485 Lb				
MACHINE WEIGHT	775 kg 1709 Lb	795 kg 1753 Lb	870 kg 1918 Lb	890 kg 1962 Lb	910 kg 2006 Lb	910 kG 2006 Lb	919 kg 2027 Lb
TOTAL WEIGHT	985 kg 2172 Lb	1051 kg 2317 Lb	1090 kg 2403 Lb	1110 kg 2447 Lb	1130 kg 2491 Lb	1130 kg 2491 Lb	1139 kg 2511 Lb
STRUCK	0,36 m ³ 0.47 yd ³	0,36 m ³ 0.47 yd ³	0,42 m ³ 0.55 yd ³	0,42 m ³ 0.55 yd ³	0,45 m ³ 0.59 yd ³	0,42 m ³ 0.55 yd ³	0,45 m ³ 0.59 yd ³
HEAPED SAE	0,50 m ³ 0.65 yd ³	0,50 m ³ 0.65 yd ³	0,60 m ³ 0.79 yd ³	0,60 m ³ 0.79 yd ³	0,63 m ³ 0.82 yd ³	0,60 m ³ 0.79 yd ³	0,63 m ³ 0.82 yd ³

SWIVEL 180°




Innovative
Easy Attach

CMF



RIX

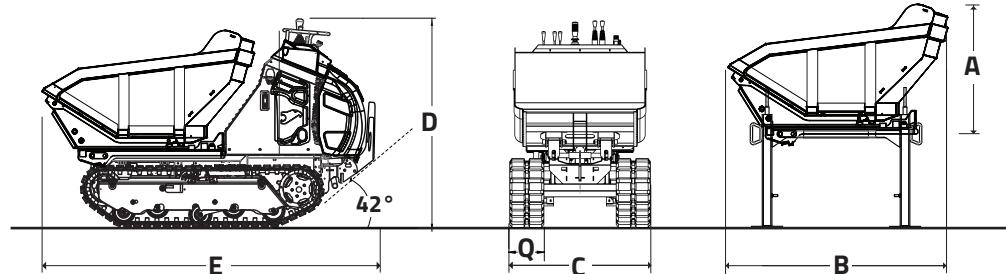

	C1150		C1200		C1300		C1350		C1400		C1500		C1600	
	mm	in												
A	828	32.6	828	32.6	828	32.6	828	32.6	828	32.6	828	32.6	828	32.6
B	1410	55.5	1410	55.5	1460	57.5	1460	57.5	1460	57.5	1460	57.5	1460	57.5
C	845	33.3	865	34.1	865	34.1	895	35.2	945	37.2	895	35.2	945	37.2
D	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1

	C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE CAPACITY	1150 kg 2535 Lb	1200 kg 2646 Lb	1300 kg 2866 Lb	1350 kg 2976 Lb	1400 kg 3087 Lb	1500 kg 3307 Lb	1600 kg 3527 Lb
ATTACHMENT WEIGHT	240 kg 529 Lb	240 kg 529 Lb	255 kg 562 Lb				
MACHINE WEIGHT	775 kg 1709 Lb	795 kg 1753 Lb	870 kg 1918 Lb	890 kg 1962 Lb	910 kg 2006 Lb	910 kG 2006 Lb	919 kg 2027 Lb
TOTAL WEIGHT	1015 kg 2238 Lb	1035 kg 2282 Lb	1125 kg 2480 Lb	1145 kg 2524 Lb	1165 kg 2568 Lb	1165 kg 2568 Lb	1174 kg 2588 Lb
STRUCK	0,38 m ³ 0.50 yd ³	0,38 m ³ 0.50 yd ³	0,47 m ³ 0.62 yd ³	0,47 m ³ 0.62 yd ³	0,50 m ³ 0.66 yd ³	0,47 m ³ 0.62 yd ³	0,50 m ³ 0.66 yd ³
HEAPED SAE	0,51 m ³ 0.67 yd ³	0,51 m ³ 0.67 yd ³	0,64 m ³ 0.84 yd ³	0,64 m ³ 0.84 yd ³	0,69 m ³ 0.90 yd ³	0,64 m ³ 0.84 yd ³	0,69 m ³ 0.90 yd ³

SELF LOADING AND DUMPER SKIP





Innovative
Easy Attach

CMF



ACW

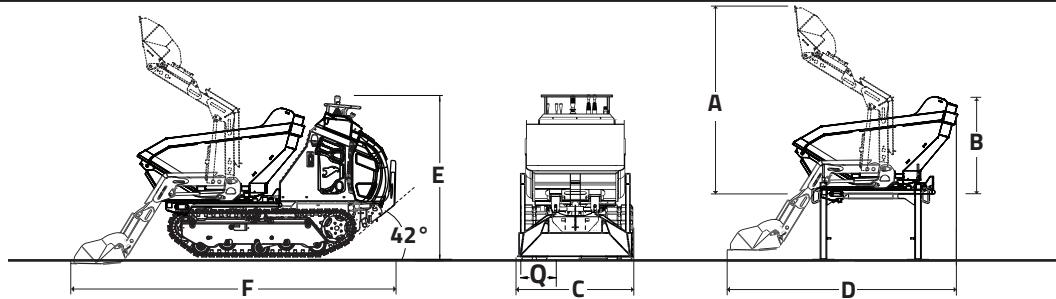

	C1150		C1200		C1300		C1350		C1400		C1500		C1600	
	mm	in												
A	1634	64.3	1634	64.3	1634	64.3	1634	64.3	1634	64.3	1634	64.3	1634	64.3
B	737	29	737	29	737	29	737	29	737	29	737	29	737	29
C	845	33.3	865	34.1	865	34.1	895	35.2	945	37.2	895	35.2	945	37.2
D	2072	81.6	2072	81.6	2177	85.7	2177	85.7	2177	85.7	2177	85.7	2177	85.7
E	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2
F	2870	113	2870	113	-	-	-	-	-	-	-	-	-	-
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1

	C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE CAPACITY	1150 kg 2535 Lb	1200 kg 2646 Lb	1300 kg 2866 Lb	1350 kg 2976 Lb	1400 kg 3087 Lb	1500 kg 3307 Lb	1600 kg 3527 Lb
ATTACHMENT WEIGHT	315 kg 695 Lb	315 kg 695 Lb	320 kg 706 Lb				
MACHINE WEIGHT	775 kg 1709 Lb	795 kg 1753 Lb	870 kg 1918 Lb	890 kg 1962 Lb	910 kg 2006 Lb	910 kG 2006 Lb	919 kg 2027 Lb
TOTAL WEIGHT	1090 kg 2403 Lb	1110 kg 2447 Lb	1190 kg 2624 Lb	1210 kg 2668 Lb	1230 kg 2712 Lb	1230 kg 2712 Lb	1239 kg 2732 Lb
STRUCK	0,29 m ³ 0,38 yd ³	0,29 m ³ 0,38 yd ³	0,35 m ³ 0,46 yd ³	0,35 m ³ 0,46 yd ³	0,37 m ³ 0,48 yd ³	0,35 m ³ 0,46 yd ³	0,37 m ³ 0,48 yd ³
HEAPED SAE	0,39 m ³ 0,51 yd ³	0,39 m ³ 0,51 yd ³	0,47 m ³ 0,62 yd ³	0,47 m ³ 0,62 yd ³	0,50 m ³ 0,65 yd ³	0,47 m ³ 0,62 yd ³	0,50 m ³ 0,65 yd ³

SELF LOADING AND SWIVEL




Innovative Easy Attach

CMF



R

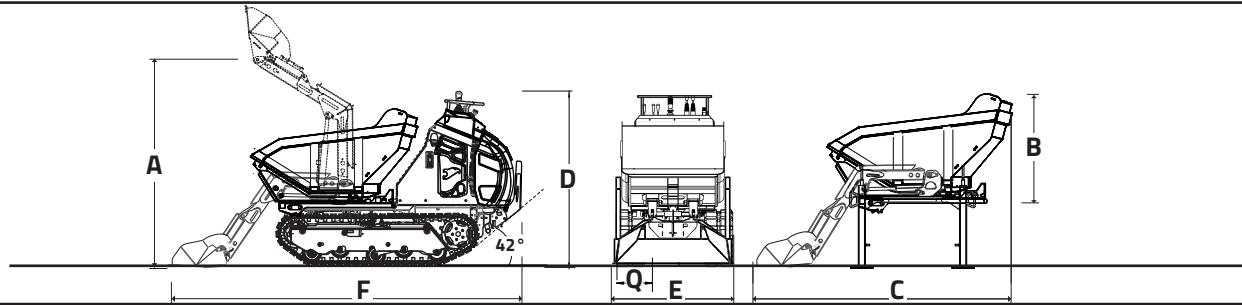

	C1150		C1200		C1300		C1350		C1400		C1500		C1600	
	mm	in												
A	1824	71.8	1824	71.8										
B	833	32.8	833	32.8										
C	845	33.3	865	34.1	865	34.1	895	35.2	945	37.2	895	35.2	945	37.2
D	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2	1350	53.2
E	2149	84.6	2149	84.6										
F	2870	113	2870	113										
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1

SELF LOADING





Innovative
Easy Attach

CMF



AC

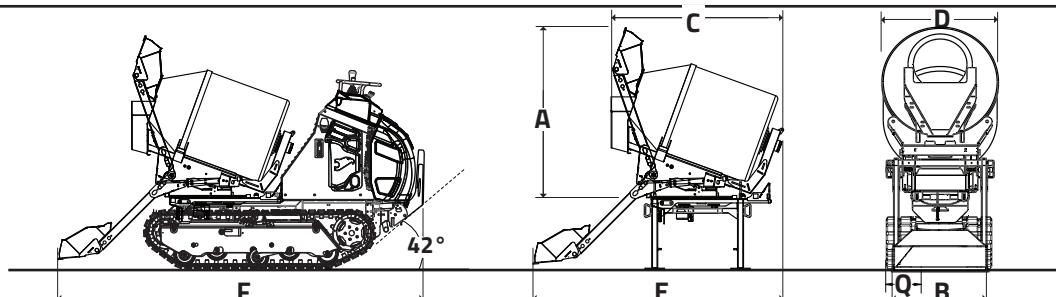

C1150		C1200		C1300		C1350		C1400		C1500		C1600		
mm	in													
A	1535	60.4	1535	60.4	1549	64.0	1549	64.0	1549	64.0	1549	64.0	1549	64.0
B	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7
C	1583	62.3	1583	62.3	1707	67.2	1707	67.2	1707	67.2	1707	67.2	1707	67.2
D	765	30.1	765	30.1	870	34.3	870	34.3	870	34.3	870	34.3	870	34.3
E	2290	90.2	2290	90.2	2422	95.4	2422	95.4	2422	95.4	2422	95.4	2422	95.4
F	-	-	-	-	-	-	-	-	-	-	-	-	-	
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1

	C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE CAPACITY	1150 kg 2535 Lb	1200 kg 2646 Lb	1300 kg 2866 Lb	1350 kg 2976 Lb	1400 kg 3087 Lb	1500 kg 3307 Lb	1600 kg 3527 Lb
ATTACHMENT WEIGHT	430 kg 948 Lb	430 kg 948 Lb	450 kg 992 Lb				
MACHINE WEIGHT	775 kg 1709 Lb	795 kg 1753 Lb	870 kg 1918 Lb	890 kg 1962 Lb	910 kg 2006 Lb	910 kG 2006 Lb	919 kg 2027 Lb
TOTAL WEIGHT	1205 kg 2657 Lb	1225 kg 2701 Lb	1320 kg 2921 Lb	1340 kg 2954 Lb	1360 kg 2998 Lb	1360 kg 2998 Lb	1369 kg 3018 Lb
GROSS CAPACITY	450 L 118.9 gal	450 L 118.9 gal	600 L 158.5 gal				
NET CAPACITY	265 L 70 gal	265 L 70 gal	350 L 92.5 gal	350 L 92.5 gal	350 L 92.5 gal	350 L 92.5 gal	350 L 92.5 gal

SELF LOADING AND SWIVEL





**Innovative
Easy Attach**

available

CMF



ACX

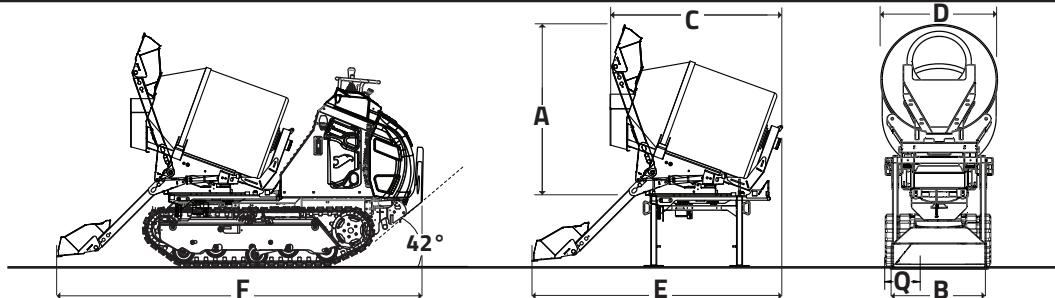

C1150		C1200		C1300		C1350		C1400		C1500		C1600		
mm	in													
A	1535	60.4	1535	60.4	1549	64.0	1549	64.0	1549	64.0	1549	64.0	1549	64.0
B	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7	728	28.7
C	1583	62.3	1583	62.3	1707	67.2	1707	67.2	1707	67.2	1707	67.2	1707	67.2
D	765	30.1	765	30.1	870	34.3	870	34.3	870	34.3	870	34.3	870	34.3
E	2290	90.2	2290	90.2	2422	95.4	2422	95.4	2422	95.4	2422	95.4	2422	95.4
F	-	-	-	-	-	-	-	-	-	-	-	-	-	
Q	180	7.1	200	7.9	200	7.9	230	9.1	230	9.1	230	9.1	230	9.1

		C1150	C1200	C1300	C1350	C1400	C1500	C1600
OPERATIVE CAPACITY		1150 kg 2535 Lb	1200 kg 2646 Lb	1300 kg 2866 Lb	1350 kg 2976 Lb	1400 kg 3087 Lb	1500 kg 3307 Lb	1600 kg 3527 Lb
ATTACHMENT WEIGHT		500 kg 1102.3 Lb	500 kg 1102.3 Lb	530 kg 1169 Lb	530 kg 1169 Lb	530 kg 1169 Lb	530 kg 1169 Lb	530 kg 1169 Lb
MACHINE WEIGHT		775 kg 1709 Lb	795 kg 1753 Lb	870 kg 1918 Lb	890 kg 1962 Lb	910 kg 2006 Lb	910 kG 2006 Lb	919 kg 2027 Lb
TOTAL WEIGHT		1275 kg 2810.9 Lb	1295 kg 2855 Lb	1400 kg 3087 Lb	1420 kg 3131 Lb	1440 kg 3175 Lb	1440 kg 3175 Lb	1449 kg 3195 Lb
GROSS CAPACITY		450 L 118.9 gal	450 L 118.9 gal	600 L 158.5 gal	600 L 158.5 gal	600 L 158.5 gal	600 L 158.5 gal	600 L 158.5 gal
NET CAPACITY		265 L 70 gal	265 L 70 gal	350 L 92.5 gal	350 L 92.5 gal	350 L 92.5 gal	350 L 92.5 gal	350 L 92.5 gal

3-SIDE





Innovative Easy Attach

CMF



RIX

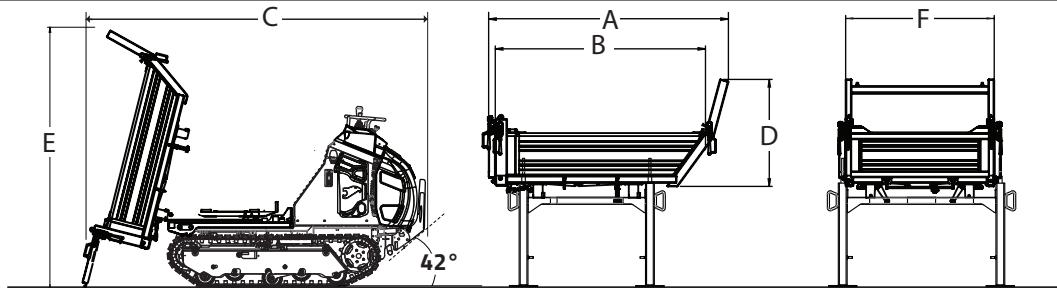

	C1150		C1200		C1300		C1350		C1400		C1500		C1600	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
A					1630	64.2	1630	64.2	1630	64.2	1630	64.2	1630	64.2
B					1429	56.3	1429	56.3	1429	56.3	1429	56.3	1429	56.3
C					2430	95.7	2430	95.7	2430	95.7	2430	95.7	2430	95.7
D					727	28.6	727	28.6	727	28.6	727	28.6	727	28.6
E					2060	81.1	2060	81.1	2060	81.1	2060	81.1	2060	81.1
F					1010	39.8	1010	39.8	1010	39.8	1010	39.8	1010	39.8

SPECIFICATIONS

SPECIFICATIONS

METRIC | U.S.

ENGINE

Diesel	Kubota D722 20 hp TIER 4 Kubota D1005 24 hp TIER 4 Kubota D1105 26 hp TIER 4	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
--------	--	-------------	-------------	-------------	-------------	-------------	-------------

TRANSMISSION

Type	Hydrostatic						
Hydraulic pump	2 variable pistons pumps 83.2 lt/min 365bar (21.9 gpm 5230 psi) 2 variable pistons pumps 93 lt/min 365bar (24.6 gpm 5234 psi)	● ●	● ●	● ●	● ●	● ●	● ●

TRACKS

Stand. tracks width	180 mm (7.1 in) 200 mm (7.9 in) 230 mm (9.1 in)	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
Track roller with grease	n°5	● ●	● ●	● ●	● ●	● ●	● ●

HYDRAULIC SYSTEM

Hydraulic pump	Gear pump	● ●	● ●	● ●	● ●	● ●	● ●
Flow std (Spec 1 - Spec 2)	1x26 l/min 165 bar (1x6.9 gpm 2393 psi)	● ●	● ●	● ●	● ●	● ●	● ●
Flow std (Spec 1 - Spec 2)	1x27 l/min 200 bar (1x7.1 gpm 2901 psi)						

HYDRAULIC SYSTEM WITH HI FLOW

Hydraulic pump	variable pistons pumps 1x36 l/min 240 bar / (1x9.5 gpm 3481 psi)	● ●	● ●	● ●	● ●	● ●	● ●
Hi Flow	1x46 l/min 260 bar / (1x12.2 gpm 3771 psi) 1x52 l/min 260 bar / (1x13.7 gpm 3771 psi)						


ADDITIONAL HYD OUTPUT

spec-1	n° 2	● ●	● ●	● ●	● ●	● ●	● ●
spec-2	n° 5	● ●	● ●	● ●	● ●	● ●	● ●
spec-3	n° 5	● ●	● ●	● ●	● ●	● ●	● ●

PERFORMANCE AND DIMENSIONS

Max. Travel Speed	6,9 Km/h (4.3 mph) 7,6 Km/h (4.7 mph)	● ●	● ●	● ●	● ●	● ●	● ●
	775 Kg (1701 lb)	● ●	● ●	● ●	● ●	● ●	● ●
	795 Kg (1753 lb)		● ●	● ●	● ●	● ●	● ●
Dry Weight	870 Kg (1918 lb)			● ●	● ●	● ●	● ●
	890 kg (1962 lb)				● ●	● ●	● ●
	910 Kg (2006 lb)					● ●	● ●
	910 Kg (2006 lb)						● ●
Parking brake	Yes	● ●	● ●	● ●	● ●	● ●	● ●
Cruise control	Yes	● ●	● ●	● ●	● ●	● ●	● ●

	mm	mm	mm	mm	mm	mm	(Z)
	(A)	(C)	(L)	(M)	(N)	(Q)	
1150	1960	1560	845	1370	250	180	42°
1200	2060	1660	865	1370	250	200	42°
1300	2160	1770	865	1370	250	200	42°
1350	2160	1770	895	1370	250	230	42°
1400	2160	1770	945	1370	250	230	42°
1500	2160	1770	895	1370	250	230	42°
1600	2160	1770	945	1370	250	230	42°

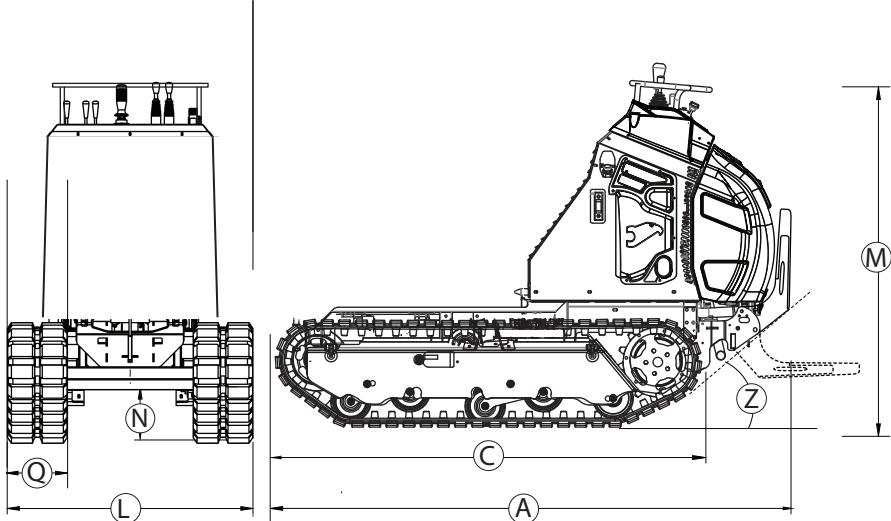

CORMIDI

CMF
MULTI FUNCTION MACHINE



ACCESSORIES

DIRECT APPLICATION ON SELF LOADING ARM

		SPEC 1	SPEC 2	SPEC 3
FORKS		ACW-ACWX	○	○
DOZER		ACW-ACWX	○	○
MINI EXCAVATOR		ACW-ACWX	○	○
			ADAPTER	

DIRECT APPLICATION ON SELF LOADING ARM WITH ADAPTER

		SPEC 1	SPEC 2	SPEC 3
FORKS		ACW-ACWX ● adapter	○	○
DOZER		ACW-ACWX ● adapter	○	○
MINI EXCAVATOR		ACW-ACWX ● adapter	○	○
BRUSH		ACW-ACWX ● adapter	○	○
HYDRAULIC BREAKER		ACW-ACWX ● adapter	○	○
TRENCHER		ACW-ACWX ● adapter	○	○
WEED WACKER		ACW-ACWX ● adapter	○	○
SNOW BLOWER		ACW-ACWX ● adapter	○	○

CORMIDI

CMF
MULTI FUNCTION MACHINE



DRIVE THE CHANGE



DRIVE THE CHANGE

EN



DRIVE YOUR CHANGE

Please note: The machines and accessories depicted in brochures and catalogues can vary from version to version, therefore please consult your distributor for a description of standard accessories and options available for each model. Cormidi reserves the right to change or to modify the specification of the machines without warning. The photos in catalogues and brochures represent the Cormidi machines in production at time of printing. However, newer and upgraded models may look different to the photos shown in this catalogue or brochure.

  Via Fonte, 342 Roccadaspide
(SA) Italy
ph. +39 0828 943688
fax +39 0828 943963

CORMIDI

25 Broad St, Norwalk
CT 06851, USA
ph.+1 203-846-6120
art@cormidiusa.com



info@cormidi.com - www.cormidi.com